SPECIFICATIONS

		FVZPRO
MODEL CODE		**FVZ34SU-PD-2E**
Drive Train		6 x 4
ENGINE		
Model		6HK1-TCS
Type		6-Cylinder In-line, 4-Cycle, Water-Cooled, OHC, Turbo With Intercooler
Displacement	cc	7,790
Bore x Stroke	mm	115 x 125
Compression Ratio		17.5 : 1
Maximum Output	kW (PS)@rpm	213 (285)@2,400
Maximum Torque	Nm (kgm)@rpm	883 (90)@1,450
Emission Level		Euro 2
Fuel System		Common Rail Direct Injection
TRANSMISSION		
Model / No. of Speed		ZF9S1115TD / 9-Speed Manual (ZF9S)
Gear Ratio	1st	8.829
	2nd	6.281
	3rd	4.644
	4th	3.478
	5th	2.538
	6th	1.806
	7th	1.335
	8th	1.000
	C	12.728
	Reverse	12.040
	Final	6.143
WEIGHT & CAPACITIES		
Gross Vehicle Weight (Design)	kg	26,000
Curb Weight	kg	6,920
Front	kg	3,114
Rear	kg	3,806
Fuel Tank Capacity	l	200
AXLE		
Front	Type	Reverse Elliot, I-Beam
Front Axle Capacity	kg	6,300
Rear	Type	Banjo, Full Floating
Rear Axle Capacity (Design 1)	kg	10,500
Rear Axle Capacity (Design 2)	kg	10,500
Total Axle Capacity (Design 1 + 2)	kg	21,000
SUSPENSION SYSTEM		
Suspension	Front	Semi Elliptical Alloy Steel Leaf Springs With Hydraulic Double Acting Telescopic Shock Absorber
	Rear	Trunnion Semi-Elliptical Leaf Springs With Torque Rods
TYRES & WHEELS		
Tyres		11R22.5-16PR
Wheels		8.25 x 22.5
BRAKES		
Service		Air Over Hydraulic, Dual Circuit
Parking Brake Type		Mechanical Expansion Type, Located At The Rear End Of Transmission
Auxiliary		Exhaust Brake
STEERING		
Steering System		Power Assist, Recirculating Ball Type
Min. Turning Radius	m	7.7
ELECTRICAL		
Battery		12V x 2
Alternator		24V-50A
DIMENSION		
Overall Length	OAL mm	8,495
Overall Width	OAW mm	2,400
Overall Height	OAH mm	2,840
Wheelbase	WB mm	4,000 + 1,300
Front Overhang	FOH mm	1,440
Rear Overhang	ROH mm	1,755
Front Tread	AW mm	1,970
Rear Tread	CW mm	1,855



Isuzu Malaysia Sdn. Bhd. is engaged in an ongoing research and development programme, and reserves the right to change specifications, resulting in advancements or technical refinements, without prior notice. All product specifications are within normal manufacturing allowances and tolerances.

Dealer's information

ISUZU MALAYSIA SDN BHD (664946-H)
501D, LEVEL 5, TOWER D, UPTOWN 5, NO.5, JALAN SS21/39,
DAMANSARA UPTOWN, 47400 PETALING JAYA, SELANGOR DARUL EHSAN.
GENERAL LINE: 03-7723 9777 FAX: 03-7723 9779
HOTLINE: 1-300-88-1133 www.isuzu.net.my

Ver. 01/Oct 2017

ISUZU

UNECE REGULATION COMPLIANT

GIGA

6 x 4 RIGID

FVZPRO GVW 26,000kg

Reliable support with round-the-clock business operation.
1-800-88-8000
ISUZU DOCTOR MOBILE 24

FREE SERVICE CAMPAIGN
UP TO 100,000km*
*Terms and Conditions apply
ISUZU

WARRANTY 3 YEARS or 100,000KM

Performance

Outstanding output and torque as well as proven durability and fuel efficiency make ISUZU GIGA ideal for businesses seeking cost-effective operation.

The powerful high-efficiency 6HK1-TCS engine with excellent output and torque, proven durability and reliability is perfect for a large variety of applications.

EURO 2

6HK1-TCS

Displacement: 7,790cc
Max. Output: 285PS@2,400rpm
Max. Torque: 883Nm (90kgm) @1,450rpm

285PS Max Power

883Nm Max Torque



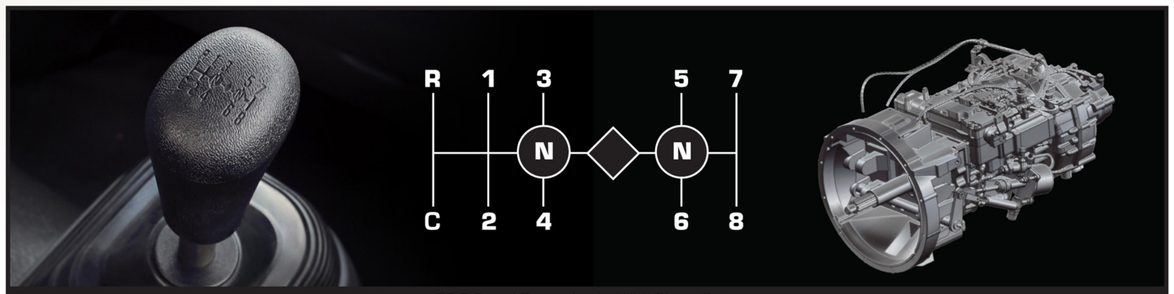

ZF 9-Speed Transmission With Direct Drive

Exterior

High rigidity, aerodynamically efficient design and user-friendliness ensure that the functionality of ISUZU GIGA is never compromised.

High Approach Angle (29 degrees)



Reinforced Frame Chassis (4.5mm + 10mm + 12mm)

Six Outer Rear View Mirrors UNECE Regulation Compliant

Rear Fog Lamp

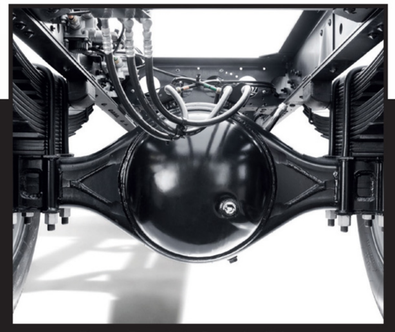

Bigger Rear Axle Capacity (21 ton)

Interior

ISUZU GIGA features ISUZU's exclusive Hexapod cabin design that maximizes interior space and comfort.

Spacious And Comfortable Cabin, Air Suspension Driver Seat

Ergonomic Instrument Panel Design

PTO Fitted

460 Diameter Steering Wheel, Energy Absorbing (Tilt & Telescopic Column, Power Assisted)

Safety

Enhanced safety features based on new global standards improve overall visibility and safety.



Double-Locking Mechanism For Cab Tilt

High Rigidity Cab With Cation Electrodepositing Coating

Bumper Mounted Headlamp

Door Impact Beam

Body Application



MODEL		FVZPRO
		FVZ34SU-PD-2E
Standard	ft	20*

Box

Refrigerated Trailer

Curtain Sider

Steel Body Tipper

Tanker

**Body length may vary according to rear body type application.*
Refer to ISUZU authorised drawing plan for actual body length at ISUZU dealers.
Pictures shown are for illustration purposes only.